



SD780 DMR

Rugged-Reliable Two-way Radio



Compact Digital Mobile Radio (DMR/TDMA)

- Dual Mode(Analog & Digital)
- Digital Voice Encryption
- Compact & Tough Design, Reliable & Durable
- Waterproof & Dustproof IP65 (Optional)



SD780 DMR

Handheld Two-way Radio

<http://www.sfecom.cn>

Main Features

- TOT(Time Out Timer)
- Auto Battery Save
- Scan Function
- Side Key Assignment Programmable
- VOX Programmable
- High/Low Power Output
- Talk Around
- PC Programming


Main Features(Digital)

- Individual Call, Group Call, All Call
- Voice Encryption
- BER Test
- 1 Time Slot

Main Features(Analogue)

- CTCSS/DCS Code
- Emergency Alert / Monitor

Accessories

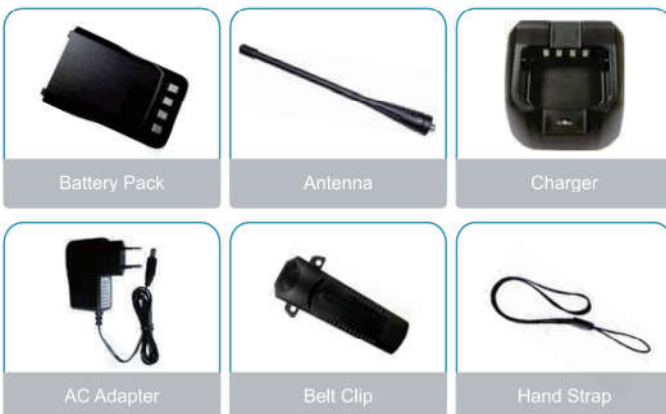

General

Frequency Range:	VHF136-174MHz / UHF400-470MHz
Channel Capacity	32 Channels
Operation Voltage	7.2V DC \pm 10%
Channel Spacing	Alalog: 25KHz/20KHz/12.5KHz Digital: 12.5KHz
Antenna Impedance	50 Ω
Battery Capacity	1650mAh/2200mAh(Li-Ion Battery)
Battery Life (5-5-90 Duty Cycle)	About 15-20 Hours
Operating Temperature	-30°C - +60°C
Frequency Stability	\pm 2.5ppm
Dimension(W*H*D)(Projections excluded)	53*28*104mm
Weight(Antenna & Battery Included)	245g

Transmitter (ETSI EN 300 086 Testing Standard)

Bandwidth	12.5KHz	
RF Power Output(High/Low)	5W	
Modulation(4FSK)	7K60FXD (Data Only)	7K60FXW(Data & Voice)
Spurious Emission	-36dB \leq 1GHz	-30dB \geq 1GHz
Adjacent Channel Power	\geq 65dB	
Hum & Noise	\geq 45dB	
Audio Response	+1~-3dB(0.3~3KHz)	+1~-3dB(0.3~2.25KHz)
Digital Vocorder	AMBE +2 TM	
Modulation Distortion	Less than 5%	
Frequency Stability	+/-5ppm	

Receiver (ETSI EN 300 086 Testing Standard)

Sensitivity(12dB SINAD)	5% BER: 0.25 μ V
Adjacent Channel Selectivity	\geq 65dB
Intermodulation	\geq 60dB
Spurious Response Rejection	\geq 70dB
Audio Response	+1~-3dB(0.3~3KHz)
Hum & Noise	\geq 36dB
Audio Distortion	\leq 5%
Audio Output	500mW with less than 10% distortion

Above specifications are tested according to TIA/EIA-603.
Above specifications are subject to change without any notice due to technology enhancement.

 **SFE**® Quanzhou SFE Electronic Technology Co.,Ltd
Address:16 Daping Rd., Daping Industrial Area, Fengze, Quanzhou,
Fujian 362000, China

SFE retains the right to change the product design and specifications without notices. If any printing mistake occurs, SFE will not bear any relevant responsibility.

©2016 SFE Electronic Technology Co.,Ltd.All Rights Reserved.

Your Local Dealer